



TO.ME.S. OIL  
 SINCE 1977 Made in Italy ISO 9001:2008



Elettropompe a palette autoadescenti con motore asincrono a corrente alternata. Corpo pompa in ghisa verniciata, albero guidato e motore a bassi regimi garantiscono prestazioni durature nel tempo. Equipaggiata con l'esclusivo sistema TO.ME.S. di ottimizzazione del trasferimento dei fluidi che aumenta l'efficienza e le prestazioni, diminuendo i decibel.

Self-priming vanes Electric pumps, powered by asynchronous AC motor. Painted cast iron Body. Shaft guided and low engine rpm ensure long-lasting performance. Equipped with TO.ME.S. exclusive fluid transfer optimization system which increases efficiency and performance while reduces decibels.

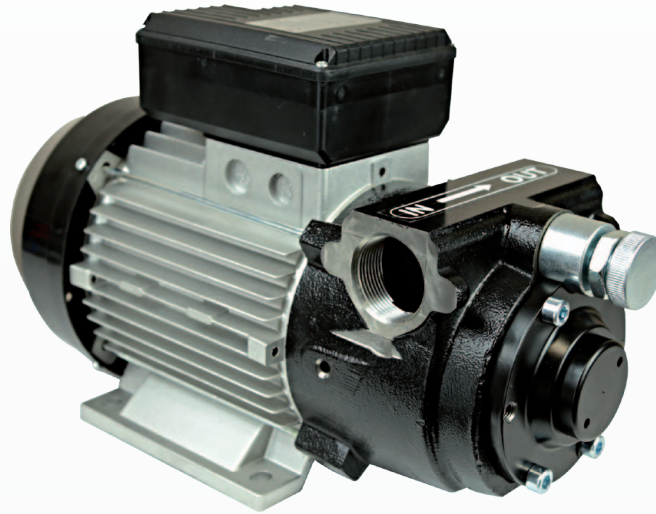

CAST IRON



BY-PASS ADJUSTABLE



ANTI-FLOODING




FREE MAX  
90  
LT/MIN




1 bar pres.  
88  
LT/MIN


DIMENSION (mm)

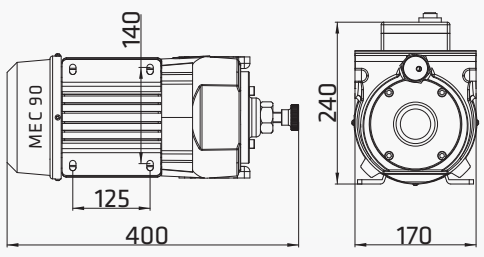

SUCTION



PERFORMANCE

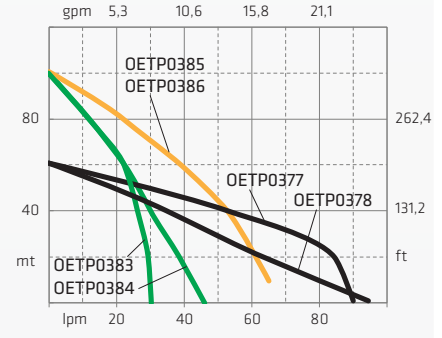

name	flow rate		bar	volts	hp		watt	ampere max	RPM	IN	OUT	weight		packing		code
	LPM	GPM			cm	inch						kg	lbs			
V-OIL	30	7,9	10	230 50Hz	2	1491	9	1400	1 1/4" F BSP	1 1/4" F BSP	26	57,3	45 x 27 x 37	17,7x10,6x14,6	OETP0383	
	40	10,6	10	400 50Hz	2	1491	3	1400	1 1/4" F BSP	1 1/4" F BSP	24	52,9	45 x 27 x 37	17,7x10,6x14,6	OETP0384	
	66	17,4	10	230 50Hz	2,5	1864	9,5	1400	1 1/4" F BSP	1 1/4" F BSP	27	59,5	45 x 27 x 37	17,7x10,6x14,6	OETP0385	
	66	17,4	10	400 50Hz	2,5	1864	3,5	1400	1 1/4" F BSP	1 1/4" F BSP	25	55,1	45 x 27 x 37	17,7x10,6x14,6	OETP0386	
	88	23,2	6	230 50Hz	2,5	1864	9	1400	1 1/4" F BSP	1 1/4" F BSP	28	61,7	45 x 27 x 37	17,7x10,6x14,6	OETP0377	
	80	21,1	6	400 50Hz	2,5	1864	4	1400	1 1/4" F BSP	1 1/4" F BSP	25	55,1	45 x 27 x 37	17,7x10,6x14,6	OETP0378	